



Auto Fuse



© LUMIACTION

Images are for representation purposes only. Confidential Information of LUMIACTION. Distribution without written permission is strictly prohibited. All information and product design may not be final and subject to change. The LUMIACTION items, though they are not genuine, are perfectly adaptable to the cars to which they make reference.



1.
Blade Fuse

p.4



2.
Bolt Down Fuse

p.8



3.
Auto Link Fuse

p.12



4.
Glass & Ceramic Fuse

p.20



5.
Inline Fuse Holder

p.26

Digital Index

Click Thumbnail
for Product Quick View



1. Blade Fuse

MAXI Blade Fuse	4
Medium (ATO/ATC) Blade Fuse	5
Mini Blade Fuse	5
Low Profile Mini Blade Fuse	6
Micro2 Blade Fuse	6
Micro3 Blade Fuse	7
Micro3 Blade Fuse - Height 18mm	7

2. Bolt Down Fuse

ANL Fuse	8
ANL Fuse - 11mm	9
MEGA Fuse	10
MIDI Fuse	10
MIDI Fuse - Contact Open	11

3. Auto Link Fuse

PAL Female Fuse - Short Groove	12
PAL Female Fuse - SF Type	13
PAL Female Fuse - Hook	13
PAL Female Fuse - Poly Surface	14
PAL Female Fuse - Mini	14
PAL Female Fuse - Mini Hook	15
JCASE Female Fuse	15
JCASE Female Fuse - Low Profile	16
JCASE Female Fuse - LP with Groove	16
Micro Cartridge Female Fuse	17
MCASE Slotted Cartridge Fuse	17
PAL Male Fuse	18
PAL Male Fuse - Contact Open	18
PAL Male Fuse - Poly Surface	19
PAL Male Fuse - Bent (13/16")	19
PAL Male Fuse - Bent (9/16")	20

4. Glass & Ceramic Fuse

SFE Glass Fuse	21
AGA Glass Fuse	22
AGC Glass Fuse	22
AGW Glass Fuse	23
AGX Glass Fuse	23
AGY Glass Fuse	24
JASO Glass Fuse	24
GMA Glass Fuse	25
GBC Tropedo Fuse	25
Ceramic Cartridge Fuse	26

5. Inline Fuse Holder

MAXI Inline Fuse Holder	27
Medium (ATO/ATC) Inline Fuse Holder	28
Mini Inline Fuse Holder	31
Low Profile Mini Inline Fuse Holder	31
Micro2 Inline Fuse Holder	32
Micro3 Inline Fuse Holder	32
Torpedo (GBC) Inline Fuse Holder	33
Inline Glass Fuse Holder	33




Blade Fuse

- **MAXI Blade Fuse**
- **Medium (ATO/ATC) Blade Fuse**
- **Mini Blade Fuse**
- **Low Profile Mini Blade Fuse**
- **Micro2 Blade Fuse**
- **Micro3 Blade Fuse**
- **Micro3 Blade Fuse - Height 18mm**

MAXI Blade Fuse



Dimensions (mm)

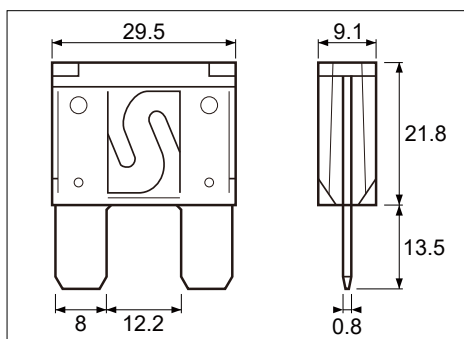

Specifications

Voltage Rating: 32 VDC

Operating Temperature Range: -40°C to +125°C

Current Rating

Part Number	Body Color	Current
MAX-20	Yellow	20A
MAX-30	Green	30A
MAX-35	Light Red	35A
MAX-40	Orange	40A
MAX-50	Red	50A
MAX-60	Blue	60A
MAX-70	Tan	70A
MAX-80	Clear	80A
MAX-100	Violet	100A

Time-Current Characteristics


% of Rating	Blowing Time
110%	4 hours Min.
200%	10 sec. Max.
350%	0.5 sec. Max.



Medium (ATO/ATC) Blade Fuse/ Plug-in Fuse



Dimensions (mm)

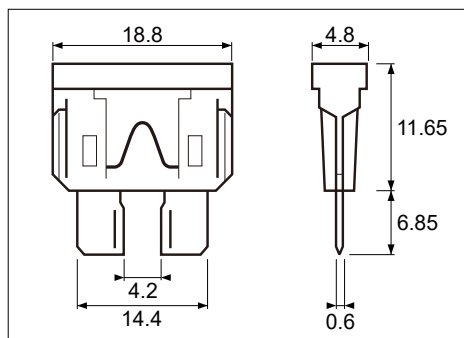

Specifications

Voltage Rating: 32 VDC

Operating Temperature Range: -40°C to +125°C


Current Rating

Part Number	Body Color	Current
AT3	Violet	3A
AT4	Pink	4A
AT5	Tan	5A
AT7.5	Brown	7.5A
AT10	Red	10A
AT15	Blue	15A
AT20	Yellow	20A
AT25	Clear	25A
AT30	Green	30A
AT35	Purple	35A


Time-Current Characteristics

% of Rating	Blowing Time
110%	4 hours Min.
200%	10 sec. Max.
350%	0.5 sec. Max.

Mini Blade Fuse/ Mini Plug-in Fuse

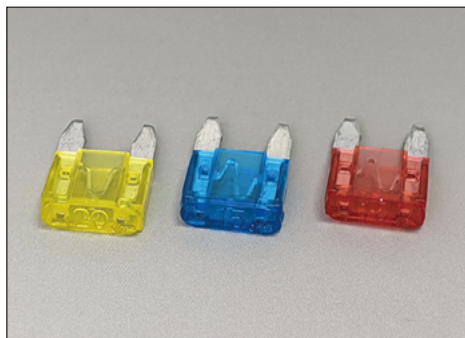

Dimensions (mm)

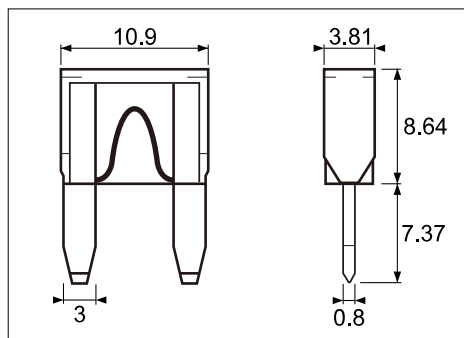

Specifications

Voltage Rating: 32 VDC

Operating Temperature Range: -40°C to +125°C

Current Rating

Part Number	Body Color	Current
MIN-3	Violet	3A
MIN-4	Pink	4A
MIN-5	Tan	5A
MIN-7.5	Brown	7.5A
MIN-10	Red	10A
MIN-15	Blue	15A
MIN-20	Yellow	20A
MIN-25	Clear	25A
MIN-30	Green	30A
MIN-35	Purple	35A


Time-Current Characteristics

% of Rating	Blowing Time
110%	4 hours Min.
200%	10 sec. Max.
350%	0.5 sec. Max.


Images are for representation purposes only. Confidential Information of LUMiACTION. Distribution without written permission is strictly prohibited. All information and product design may not be final and subject to change.



Low Profile Mini Blade Fuse

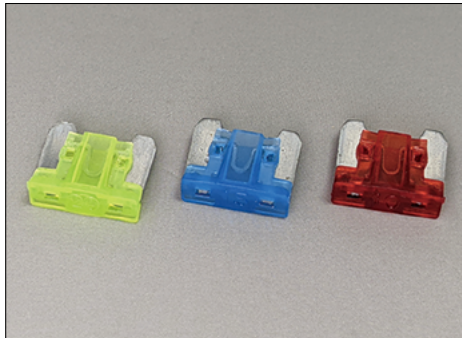

Dimensions (mm)

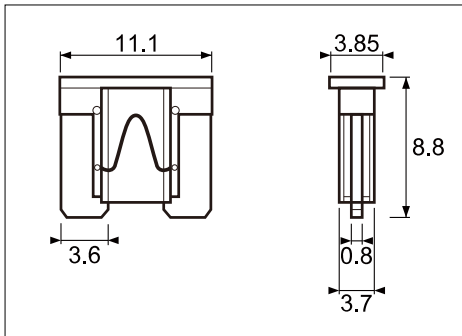

Specifications

Voltage Rating: 32 VDC

Operating Temperature Range: -40°C to +125°C

Current Rating

Part Number	Body Color	Current
LMF-SMINI-3	Violet	3A
LMF-SMINI-4	Pink	4A
LMF-SMINI-5	Tan	5A
LMF-SMINI-7.5	Brown	7.5A
LMF-SMINI-10	Red	10A
LMF-SMINI-15	Blue	15A
LMF-SMINI-20	Yellow	20A
LMF-SMINI-25	Clear	25A
LMF-SMINI-30	Green	30A
LMF-SMINI-35	Purple	35A


Time-Current Characteristics

% of Rating	Blowing Time
110%	4 hours Min.
200%	10 sec. Max.
350%	0.5 sec. Max.

Micro2 Blade Fuse



Dimensions (mm)

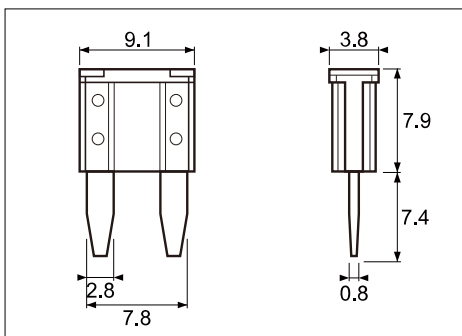

Specifications

Voltage Rating: 32 VDC

Operating Temperature Range: -40°C to +125°C

Current Rating


Part Number	Body Color	Current
LMF-MICRO2-5	Tan	5A
LMF-MICRO2-7.5	Brown	7.5A
LMF-MICRO2-10	Red	10A
LMF-MICRO2-15	Blue	15A
LMF-MICRO2-20	Yellow	20A
LMF-MICRO2-25	Clear	25A
LMF-MICRO2-30	Green	30A

Time-Current Characteristics


% of Rating	Blowing Time
110%	4 hours Min.
200%	10 sec. Max.
350%	0.5 sec. Max.

Images are for representation purposes only. Confidential Information of LUMIACTION. Distribution without written permission is strictly prohibited. All information and product design may not be final and subject to change.

Micro3 Blade Fuse

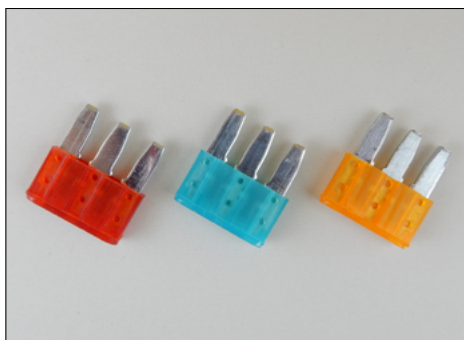

Dimensions (mm)

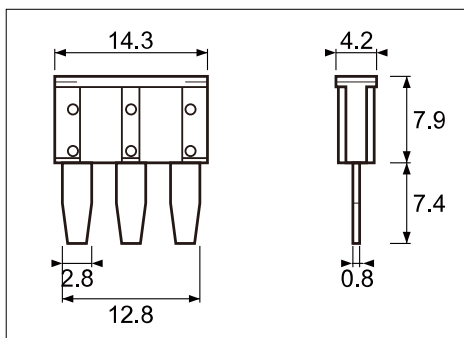

Specifications

Voltage Rating: 32 VDC

Operating Temperature Range: -40°C to +125°C

Current Rating

Part Number	Body Color	Current
LMF-MICRO3-5	Tan	5A
LMF-MICRO3-7.5	Brown	7.5A
LMF-MICRO3-10	Red	10A
LMF-MICRO3-15	Blue	15A


Time-Current Characteristics

% of Rating	Blowing Time
110%	4 hours Min.
200%	10 sec. Max.
350%	0.5 sec. Max.

Micro3 Blade Fuse - Height 18mm



Dimensions (mm)

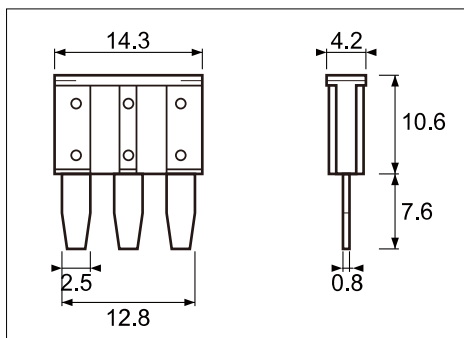

Specifications

Voltage Rating: 32 VDC

Operating Temperature Range: -40°C to +125°C

Current Rating

Part Number	Body Color	Current
LMF-MICRO3-5-18MM	Tan	5A
LMF-MICRO3-7.5-18MM	Brown	7.5A
LMF-MICRO3-10-18MM	Red	10A
LMF-MICRO3-15-18MM	Blue	15A

Time-Current Characteristics


% of Rating	Blowing Time
110%	4 hours Min.
200%	10 sec. Max.
350%	0.5 sec. Max.




Bolt-Down Fuse

- **ANL Fuse**
- **ANL Fuse - 11mm**
- **MEGA Fuse**
- **MIDI Fuse**
- **MIDI Fuse - Open**

ANL Fuse

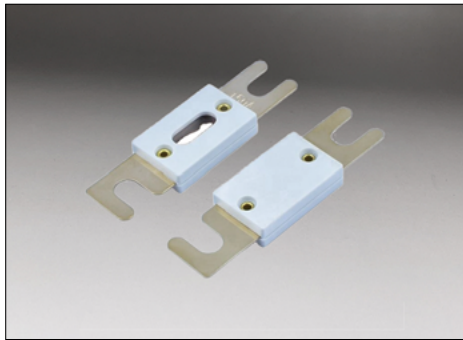

Dimensions (mm)

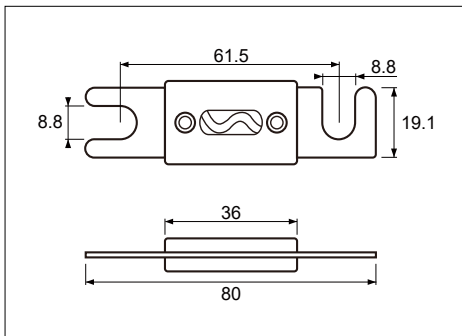

Specifications

Voltage Rating: 32 VDC
Operating Temperature Range: -40°C to +125°C
Finishing: Gold Plated (G), Nickle Plated (N)


Current Rating

Part Number	Part Number	Current
LMFL-ANL-N50	LMFL-ANL-G50	50A
LMFL-ANL-N60	LMFL-ANL-G60	60A
LMFL-ANL-N70	LMFL-ANL-G70	70A
LMFL-ANL-N80	LMFL-ANL-G80	80A
LMFL-ANL-N100	LMFL-ANL-G100	100A
LMFL-ANL-N125	LMFL-ANL-G125	125A
LMFL-ANL-N150	LMFL-ANL-G150	150A
LMFL-ANL-N175	LMFL-ANL-G175	175A
LMFL-ANL-N200	LMFL-ANL-G200	200A
LMFL-ANL-N225	LMFL-ANL-G225	225A
LMFL-ANL-N250	LMFL-ANL-G250	250A
LMFL-ANL-N275	LMFL-ANL-G275	275A
LMFL-ANL-N300	LMFL-ANL-G300	300A
LMFL-ANL-N325	LMFL-ANL-G325	325A
LMFL-ANL-N350	LMFL-ANL-G350	350A
LMFL-ANL-N375	LMFL-ANL-G375	375A
LMFL-ANL-N400	LMFL-ANL-G400	400A
LMFL-ANL-N425	LMFL-ANL-G425	425A
LMFL-ANL-N450	LMFL-ANL-G450	450A
LMFL-ANL-N500	LMFL-ANL-G500	500A


Time-Current Characteristics

% of Rating	Blowing Time
110%	4 hours Min.
200%	10 sec. Max.
350%	0.5 sec. Max.

ANL Fuse - 11mm

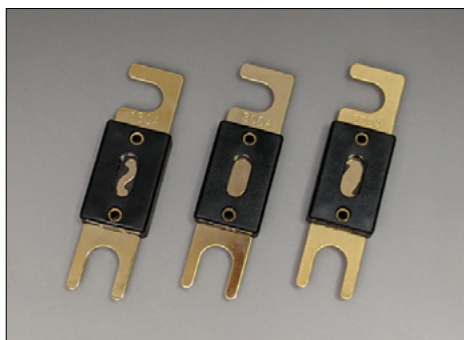

Dimensions (mm)

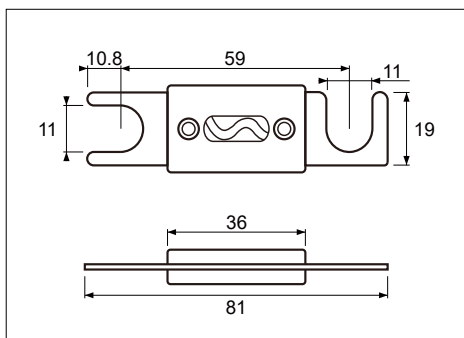

Specifications

Voltage Rating: 32 VDC

Operating Temperature Range: -40°C to +125°C

Finishing: Gold Plated

* Alternative dimension are available upon request.

Current Rating

Part Number	Current
LMFL-ANL-G50-11	50A
LMFL-ANL-G60-11	60A
LMFL-ANL-G70-11	70A
LMFL-ANL-G80-11	80A
LMFL-ANL-G100-11	100A
LMFL-ANL-G125-11	125A
LMFL-ANL-G150-11	150A
LMFL-ANL-G175-11	175A
LMFL-ANL-G200-11	200A
LMFL-ANL-G225-11	225A
LMFL-ANL-G250-11	250A
LMFL-ANL-G275-11	275A
LMFL-ANL-G300-11	300A
LMFL-ANL-G325-11	325A
LMFL-ANL-G350-11	350A
LMFL-ANL-G375-11	375A
LMFL-ANL-G400-11	400A
LMFL-ANL-G425-11	425A
LMFL-ANL-G450-11	450A
LMFL-ANL-G500-11	500A

Time-Current Characteristics


% of Rating	Blowing Time
110%	4 hours Min.
200%	10 sec. Max.
350%	0.5 sec. Max.



MEGA Fuse



Dimensions (mm)

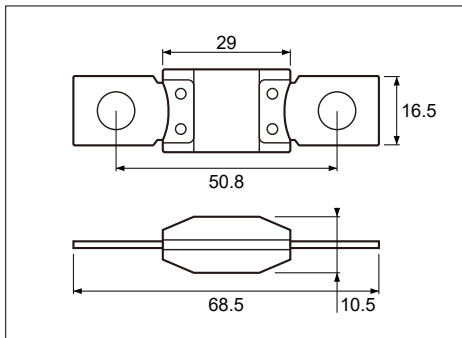

Specifications

Voltage Rating: 32 VDC
Finishing: Nickle Plated


Current Rating

Part Number	Body Color	Current
LMFL-MEGA-80	Red	80A
LMFL-MEGA-100	Yellow	100A
LMFL-MEGA-125	Green	125A
LMFL-MEGA-150	Orange	150A
LMFL-MEGA-175	White	175A
LMFL-MEGA-200	Blue	200A
LMFL-MEGA-225	Beige	225A
LMFL-MEGA-250	Pink	250A
LMFL-MEGA-500	Brown	250A


Time-Current Characteristics

% of Rating	Blowing Time
110%	4 hours Min.
200%	10 sec. Max.
350%	0.5 sec. Max.

MIDI Fuse

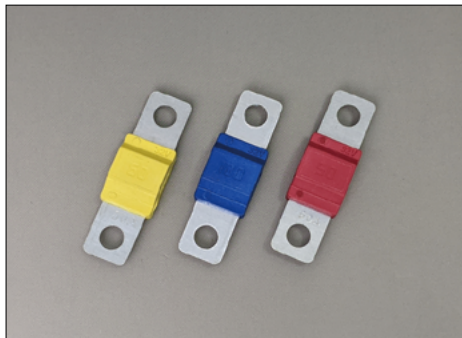

Dimensions (mm)

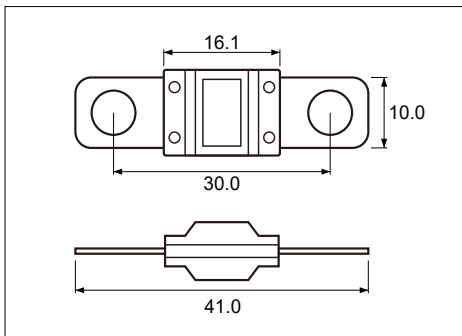

Specifications

Voltage Rating: 32 VDC
Finishing: Nickle Plated

Current Rating

Part Number	Body Color	Current
LMFL-MIDI-30	Orange	30A
LMFL-MIDI-40	Green	40A
LMFL-MIDI-50	Red	50A
LMFL-MIDI-60	Yellow	60A
LMFL-MIDI-70	Brown	70A
LMFL-MIDI-80	White	80A
LMFL-MIDI-100	Blue	100A
LMFL-MIDI-125	Pink	125A
LMFL-MIDI-150	Black	150A
LMFL-MIDI-200	Violet	200A

Time-Current Characteristics

% of Rating	Blowing Time
110%	4 hours Min.
200%	10 sec. Max.
350%	0.5 sec. Max.


Images are for representation purposes only. Confidential Information of LUMIACTION. Distribution without written permission is strictly prohibited. All information and product design may not be final and subject to change.



MIDI Fuse - Contact Open



Dimensions (mm)

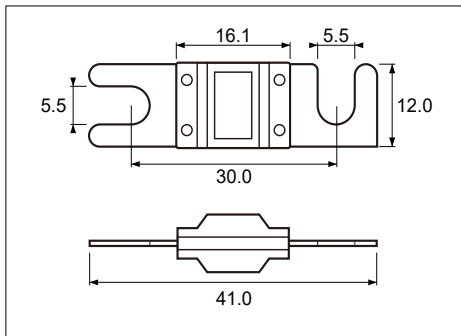

Specifications

Voltage Rating: 32 VDC

Finishing: Gold Plated (G), Nickle Plated (N)

Current Rating

Part Number	Body Color	Current
LMFL-MIDI-30U	Orange	30A
LMFL-MIDI-40U	Green	40A
LMFL-MIDI-50U	Red	50A
LMFL-MIDI-60U	Yellow	60A
LMFL-MIDI-70U	Brown	70A
LMFL-MIDI-80U	Clear	80A
LMFL-MIDI-100U	Blue	100A
LMFL-MIDI-125U	Pink	125A
LMFL-MIDI-150U	Grey	150A
LMFL-MIDI-200U	Violet	200A

Time-Current Characteristics

% of Rating	Blowing Time
110%	4 hours Min.
200%	10 sec. Max.
350%	0.5 sec. Max.




Auto Link Fuse/ Fusible Link

- PAL Female Fuse - Short Groove
- PAL Female Fuse - SF Type
- PAL Female Fuse - Hook
- PAL Female Fuse - Poly Surface
- PAL Female Fuse - Mini
- PAL Female Fuse - Mini Hook
- JCASE Female Fuse
- JCASE Female Fuse - Low Profile
- JCASE Female Fuse - Low Profile with Groove
- Micro Cartridge Female Fuse
- MCASE Slotted Cartridge Fuse
- PAL Male Fuse
- PAL Male Fuse - Contact Open
- PAL Male Fuse - Poly Surface
- PAL Male Fuse - Bent (13/16")
- PAL Male Fuse - Bent (9/16")

PAL Female Fuse - Short Groove



Dimensions (mm)

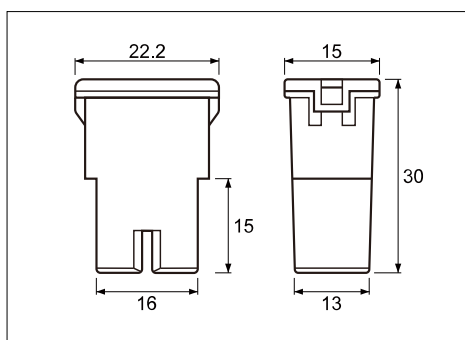

Specifications

Voltage Rating: 32 VDC

Operating Temperature Range: -40°C to +125°C


Current Rating

Part Number	Body Color	Current
LMFL-120	White	20A
LMFL-122	Pink	30A
LMFL-124	Green	40A
LMFL-126	Red	50A
LMFL-128	Yellow	60A
LMFL-129	Brown	70A
LMFL-130	Black	80A
LMFL-132	Blue	100A
LMFL-134	Grey	120A


Time-Current Characteristics

% of Rating	Blowing Time
110%	4 hours Min.
200%	10 sec. Max.
350%	0.5 sec. Max.

PAL Female Fuse - SF Type

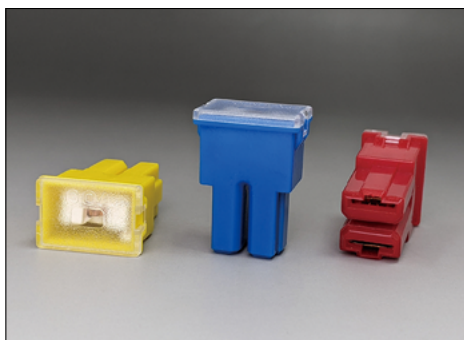

Dimensions (mm)

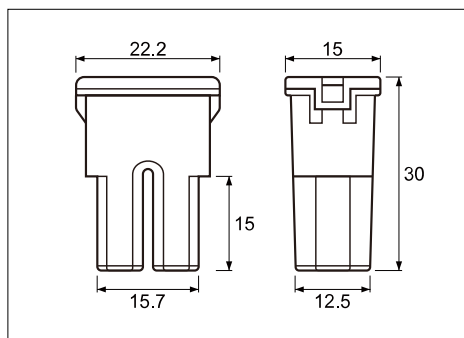

Specifications

Voltage Rating: 32 VDC

Operating Temperature Range: -40°C to +125°C


Current Rating

Part Number	Body Color	Current
LMFL-120SF	White	20A
LMFL-122SF	Pink	30A
LMFL-124SF	Green	40A
LMFL-126SF	Red	50A
LMFL-128SF	Yellow	60A
LMFL-129SF	Brown	70A
LMFL-130SF	Black	80A
LMFL-132SF	Blue	100A
LMFL-134SF	Grey	120A


Time-Current Characteristics

% of Rating	Blowing Time
110%	4 hours Min.
200%	10 sec. Max.
350%	0.5 sec. Max.

PAL Female Fuse - Hook

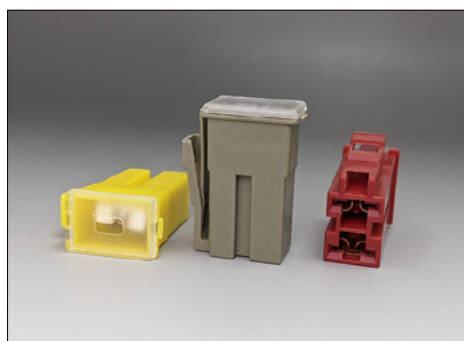

Dimensions (mm)

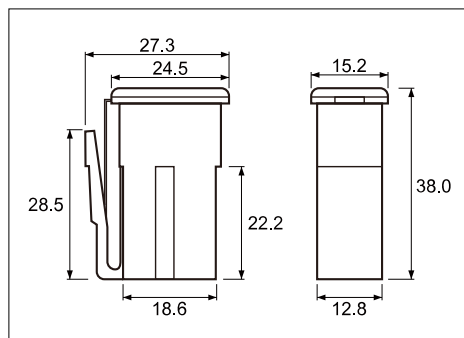

Specifications

Voltage Rating: 32 VDC

Operating Temperature Range: -40°C to +125°C

Current Rating

Part Number	Body Color	Current
LMFL-216	Red	45A
LMFL-218	Yellow	65A
LMFL-219	Brown	75A

Time-Current Characteristics

% of Rating	Blowing Time
110%	4 hours Min.
200%	10 sec. Max.
350%	0.5 sec. Max.


Images are for representation purposes only. Confidential Information of LUMiACTION. Distribution without written permission is strictly prohibited. All information and product design may not be final and subject to change.



PAL Female Fuse - Poly Surface



Dimensions (mm)

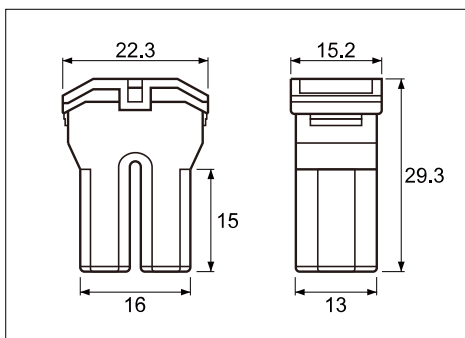

Specifications

Voltage Rating: 32 VDC

Operating Temperature Range: -40°C to +125°C

Current Rating

Part Number	Body Color	Current
LMFL-120MSF	White	20A
LMFL-122MSF	Pink	30A
LMFL-124MSF	Green	40A
LMFL-126MSF	Red	50A
LMFL-128MSF	Yellow	60A
LMFL-129MSF	Brown	70A
LMFL-130MSF	Black	80A
LMFL-132MSF	Blue	100A
LMFL-134MSF	Grey	120A


Time-Current Characteristics

% of Rating	Blowing Time
110%	4 hours Min.
200%	10 sec. Max.
350%	0.5 sec. Max.

PAL Female Fuse - Mini



Dimensions (mm)

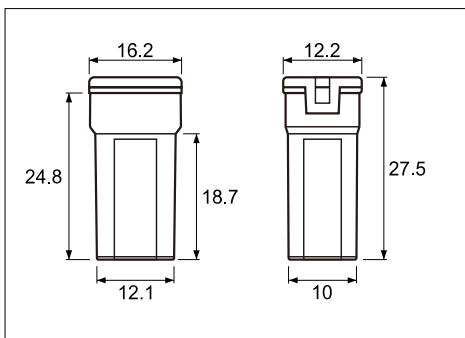

Specifications

Voltage Rating: 32 VDC

Operating Temperature Range: -40°C to +125°C

Current Rating

Part Number	Body Color	Current
LMFL-120MF-16MM	White	20A
LMFL-122MF-16MM	Pink	30A
LMFL-124MF-16MM	Green	40A
LMFL-126MF-16MM	Red	50A
LMFL-128MF-16MM	Yellow	60A
LMFL-129MF-16MM	Brown	70A
LMFL-130MF-16MM	Black	80A
LMFL-132MF-16MM	Blue	100A


Time-Current Characteristics

% of Rating	Blowing Time
110%	4 hours Min.
200%	10 sec. Max.
350%	0.5 sec. Max.


Images are for representation purposes only. Confidential Information of LUMIACTION. Distribution without written permission is strictly prohibited. All information and product design may not be final and subject to change.



PAL Female Fuse - Mini Hook

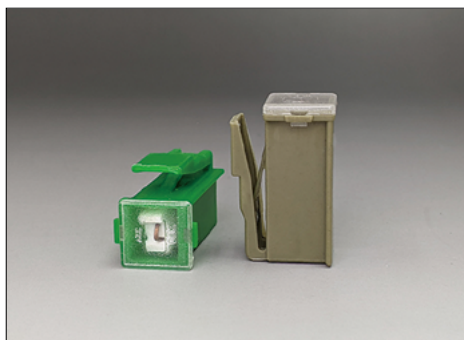

Dimensions (mm)

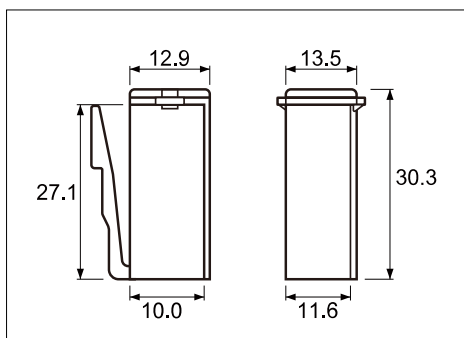

Specifications

Voltage Rating: 32 VDC

Operating Temperature Range: -40°C to +125°C

Current Rating

Part Number	Body Color	Current
LMFL-202	Brown	25A
LMFL-204	Green	30A


Time-Current Characteristics

% of Rating	Blowing Time
110%	4 hours Min.
200%	10 sec. Max.
350%	0.5 sec. Max.

JCASE Female Fuse



Dimensions (mm)

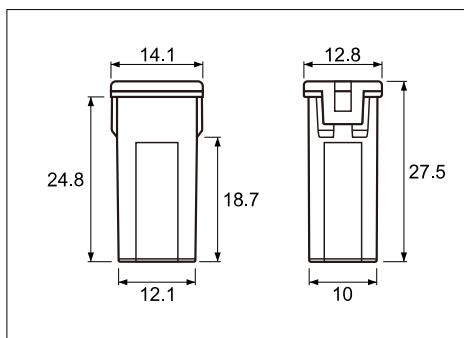

Specifications

Voltage Rating: 32 VDC

Operating Temperature Range: -40°C to +125°C

Current Rating

Part Number	Body Color	Current
LMFL-120MF	White	20A
LMFL-122MF	Pink	30A
LMFL-124MF	Green	40A
LMFL-126MF	Red	50A
LMFL-128MF	Yellow	60A
LMFL-129MF	Brown	70A
LMFL-130MF	Black	80A
LMFL-132MF	Blue	100A
LMFL-134MF	Grey	120A

Time-Current Characteristics

% of Rating	Blowing Time
110%	4 hours Min.
200%	10 sec. Max.
350%	0.5 sec. Max.


Images are for representation purposes only. Confidential Information of LUMiACTION. Distribution without written permission is strictly prohibited. All information and product design may not be final and subject to change.



Jcase Female Fuse - Low Profile



Dimensions (mm)

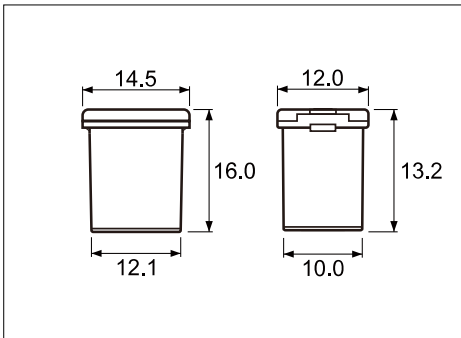

Specifications

Voltage Rating: 58 VDC

Operating Temperature Range: -40°C to +125°C

Current Rating

Part Number	Body Color	Current
LMFL-120LPF	Blue	20A
LMFL-121LPF	White	25A
LMFL-122LPF	Pink	30A
LMFL-124LPF	Green	40A
LMFL-126LPF	Red	50A
LMFL-128LPF	Yellow	60A


Time-Current Characteristics

% of Rating	Blowing Time
110%	4 hours Min.
200%	10 sec. Max.
350%	0.5 sec. Max.

Jcase Female Fuse - Low Profile with Groove



Dimensions (mm)

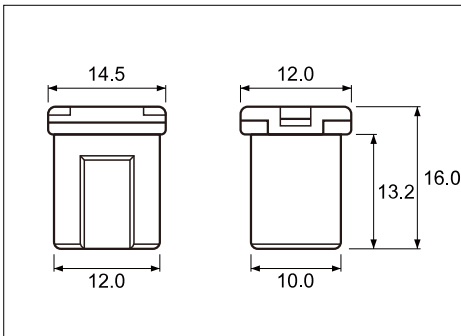

Specifications

Voltage Rating: 32 VDC

Operating Temperature Range: -40°C to +125°C

Current Rating

Part Number	Body Color	Current
LMFL-120LPF/SG	Light Blue	20A
LMFL-122LPF/SG	Pink	30A
LMFL-124LPF/SG	Green	40A
LMFL-126LPF/SG	Red	50A
LMFL-128LPF/SG	Yellow	60A
LMFL-129LPF/SG	Brown	70A
LMFL-130LPF/SG	Black	80A
LMFL-132LPF/SG	Blue	100A


Time-Current Characteristics

% of Rating	Blowing Time
110%	4 hours Min.
200%	10 sec. Max.
350%	0.5 sec. Max.

Micro Cartridge Female Fuse



Dimensions

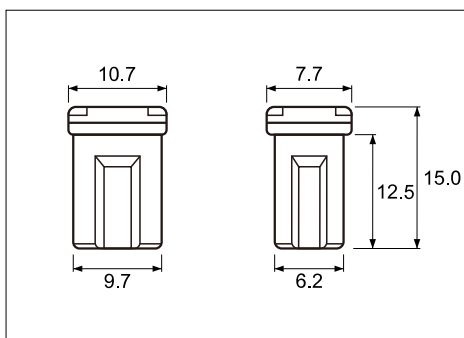

Specifications (mm)

Voltage Rating: 32 VDC

Operating Temperature Range: -40°C to +125°C

Current Rating

Part Number	Body Color	Current
LMFL-LPMF15	Grey	15A
LMFL-LPMF20	Blue	20A
LMFL-LPMF25	White	25A
LMFL-LPMF30	Pink	30A
LMFL-LPMF40	Green	40A


Time-Current Characteristics

% of Rating	Blowing Time
110%	4 hours Min.
200%	10 sec. Max.
350%	0.5 sec. Max.

MCASE Slotted Cartridge Fuse



Dimensions (mm)

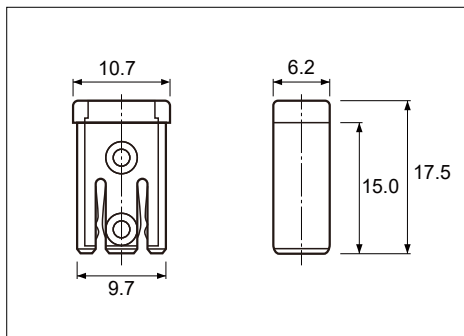

Specifications

Voltage Rating: 32 VDC

Operating Temperature Range: -40°C to +125°C

Current Rating

Part Number	Body Color	Current
LMFL-MC-S15	Light Grey	15A
LMFL-MC-S20	Light Blue	20A
LMFL-MC-S25	White	25A
LMFL-MC-S30	Pink	30A
LMFL-MC-S40	Green	40A
LMFL-MC-S50	Red	50A
LMFL-MC-S60	Yellow	60A

Time-Current Characteristics


% of Rating	Blowing Time
110%	100 hours Min.
200%	60 sec. Max.
350%	7 sec. Max.



PAL Male Fuse



Dimensions (mm)

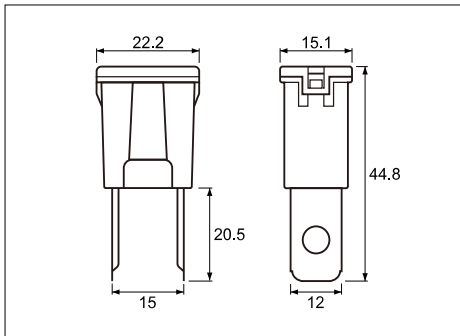

Specifications

Voltage Rating: 32 VDC

Operating Temperature Range: -40°C to +125°C

Current Rating

Part Number	Body Color	Current
LMFL-150	White	20A
LMFL-152	Pink	30A
LMFL-154	Green	40A
LMFL-156	Red	50A
LMFL-158	Yellow	60A
LMFL-159	Brown	70A
LMFL-160	Black	80A
LMFL-162	Blue	100A
LMFL-164	Grey	120A


Time-Current Characteristics

% of Rating	Blowing Time
110%	4 hours Min.
200%	10 sec. Max.
350%	0.5 sec. Max.

PAL Male Fuse - Contact Open



Dimensions (mm)

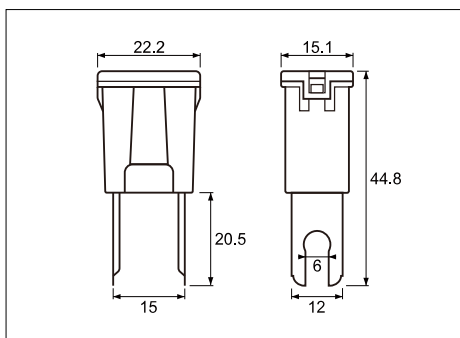

Specifications

Voltage Rating: 32 VDC

Operating Temperature Range: -40°C to +125°C

Current Rating

Part Number	Body Color	Current
LMFL-150NEW	White	20A
LMFL-152NEW	Pink	30A
LMFL-154NEW	Green	40A
LMFL-156NEW	Red	50A
LMFL-158NEW	Yellow	60A
LMFL-159NEW	Brown	70A
LMFL-160NEW	Black	80A
LMFL-162NEW	Blue	100A
LMFL-164NEW	Grey	120A

Time-Current Characteristics

% of Rating	Blowing Time
110%	4 hours Min.
200%	10 sec. Max.
350%	0.5 sec. Max.


Images are for representation purposes only. Confidential Information of LUMIACTION. Distribution without written permission is strictly prohibited. All information and product design may not be final and subject to change.



PAL Male Fuse - Poly Surface



Dimensions (mm)

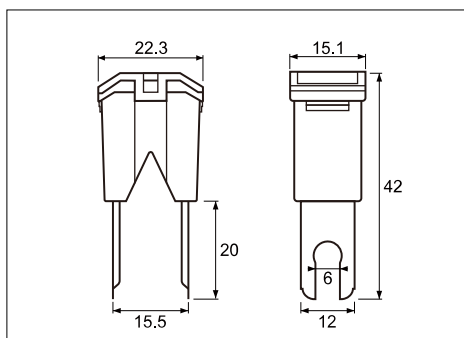

Specifications

Voltage Rating: 32 VDC

Operating Temperature Range: -40°C to +125°C


Current Rating

Part Number	Body Color	Current
LMFL-150MV	White	20A
LMFL-152MV	Pink	30A
LMFL-154MV	Green	40A
LMFL-156MV	Red	50A
LMFL-158MV	Yellow	60A
LMFL-159MV	Brown	70A
LMFL-160MV	Black	80A
LMFL-162MV	Blue	100A
LMFL-164MV	Grey	120A


Time-Current Characteristics

% of Rating	Blowing Time
110%	4 hours Min.
200%	10 sec. Max.
350%	0.5 sec. Max.

PAL Male Fuse - Bent (13/16")

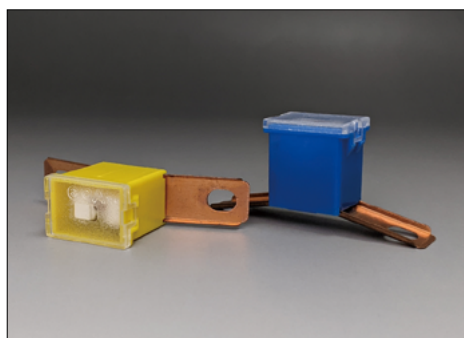

Dimensions (mm)

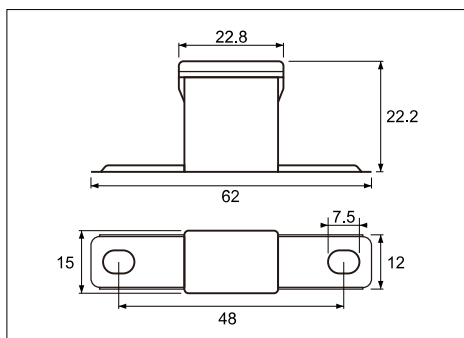

Specifications

Voltage Rating: 32 VDC

Operating Temperature Range: -40°C to +125°C

Current Rating

Part Number	Body Color	Current
LMFL-181	White	20A
LMFL-180	Pink	30A
LMFL-182	Green	40A
LMFL-184	Red	50A
LMFL-186	Yellow	60A
LMFL-187	Brown	70A
LMFL-188	Black	80A
LMFL-190	Blue	100A
LMFL-192	Grey	120A

Time-Current Characteristics

% of Rating	Blowing Time
110%	4 hours Min.
200%	10 sec. Max.
350%	0.5 sec. Max.


Images are for representation purposes only. Confidential Information of LUMiACTION. Distribution without written permission is strictly prohibited. All information and product design may not be final and subject to change.



PAL Male Fuse - Bent (9/16")



Dimensions (mm)

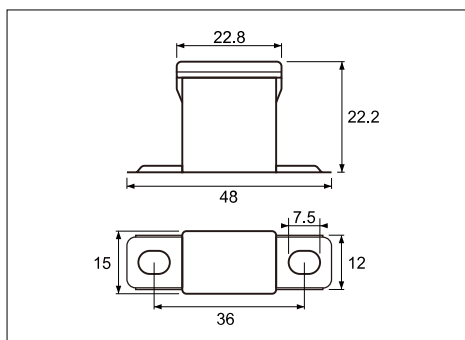

Specifications

Voltage Rating: 32 VDC

Operating Temperature Range: -40°C to +125°C

Current Rating

Part Number	Body Color	Current
LMFL-181SL	White	20A
LMFL-180SL	Pink	30A
LMFL-182SL	Green	40A
LMFL-184SL	Red	50A
LMFL-186SL	Yellow	60A
LMFL-187SL	Brown	70A
LMFL-188SL	Black	80A
LMFL-190SL	Blue	100A
LMFL-192SL	Grey	120A

Time-Current Characteristics


% of Rating	Blowing Time
110%	4 hours Min.
200%	10 sec. Max.
350%	0.5 sec. Max.




Glass & Ceramic Fuse

- *SFE Glass Fuse*
- *AGA Glass Fuse*
- *AGC Glass Fuse*
- *AGW Glass Fuse*
- *AGX Glass Fuse*
- *AGY Glass Fuse*
- *JASO Glass Fuse*
- *GMA Glass Fuse*
- *GBC Torpedo Fuse*
- *Ceramic Cartridge Fuse*

SFE Glass Fuse

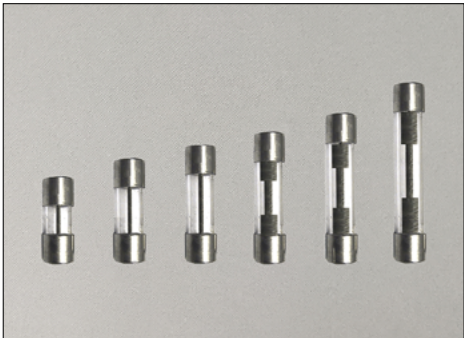

Dimensions (mm)

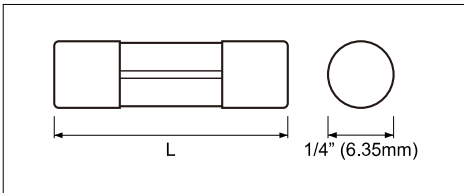

Current Rating


Part Number	Current	Length (L)	
		Inches	mm
SFE-4	4A	5/8"	15.9mm
SFE-6	6A	3/4"	19.0mm
SFE-7-1/2	7.5A	7/8"	22.2mm
SFE-9	9A	7/8"	22.2mm
SFE-14	14A	1-1/16"	27.0mm
SFE-20	20A	1-1/4"	31.7mm
SFE-30	30A	1-7/16"	36.5mm

Specifications


Operating Temperature Range: -40°C to +125°C



AGA Glass Fuse

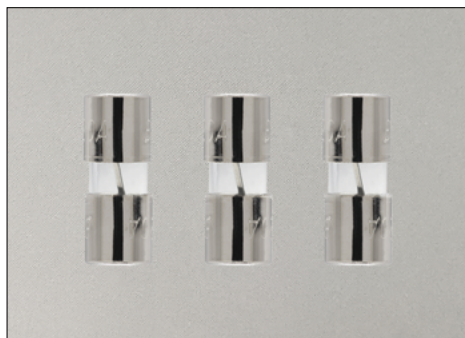

Dimensions (mm)

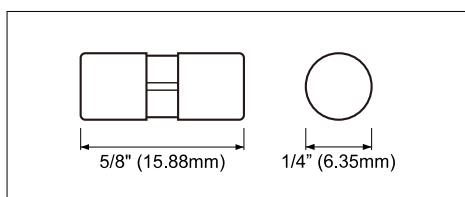

Specifications

Operating Temperature Range: -40°C to +125°C


Current Rating

Part Number	Current	Length (L)	
		Inches	mm
AGA-1	1A	5/8"	15.9mm
AGA-1-1/2	1.5A		
AGA-2	2A		
AGA-2-1/2	2.5A		
AGA-3	3A		
AGA-5	5A		
AGA-6	6A		
AGA-7-1/2	7.5A		
AGA-10	10A		
AGA-15	15A		
AGA-20	20A		
AGA-30	30A		

AGC Glass Fuse



Dimensions (mm)

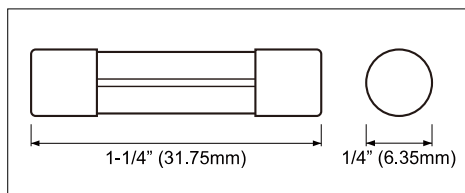

Specifications

Operating Temperature Range: -40°C to +125°C

Current Rating


Part Number	Current	Length (L)	
		Inches	mm
AGC-1	1A	1-1/4"	31.7mm
AGC-1-1/2	1.5A		
AGC-2	2A		
AGC-2-1/2	2.5A		
AGC-3	3A		
AGC-4	4A		
AGC-5	5A		
AGC-6	6A		
AGC-7-1/2	7.5A		
AGC-10	10A		
AGC-15	15A		
AGC-20	20A		
AGC-25	25A		
AGC-30	30A		
AGC-35	35A		



AGW Glass Fuse



Dimensions (mm)

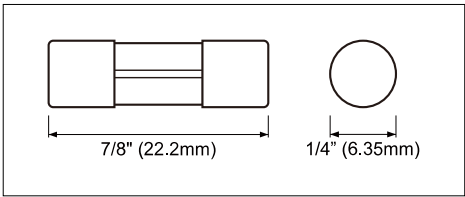

Specifications

Operating Temperature Range: -40°C to +125°C


Current Rating

Part Number	Current	Length (L)	
		Inches	mm
AGW-1	1A	7/8"	22.2mm
AGW-2-1/2	2.5A		
AGW-3	3A		
AGW-4	4A		
AGW-5	5A		
AGW-6	6A		
AGA-7-1/2	7.5A		
AGA-15	15A		
AGA-20	20A		
AGA-30	30A		

AGX Glass Fuse



Dimensions (mm)

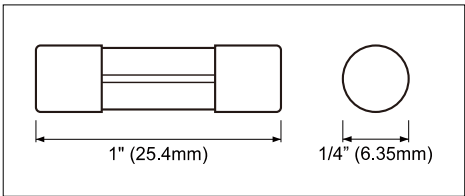

Specifications

Operating Temperature Range: -40°C to +125°C

Current Rating


Part Number	Current	Length (L)	
		Inches	mm
AGX-2	2A	1"	25.4mm
AGX-3	3A		
AGX-20	20A		
AGX-25	25A		
AGX-30	30A		



AGY Glass Fuse



Dimensions (mm)

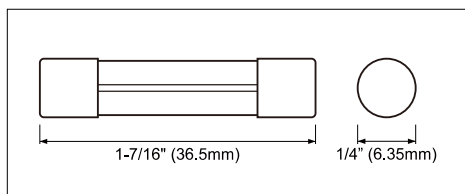

Specifications

Operating Temperature Range: -40°C to +125°C


Current Rating

Part Number	Current	Length (L)	
		Inches	mm
AGY-50	50A	1-7/16"	36.5mm

JASO Japanese Glass Fuse



Dimensions (mm)

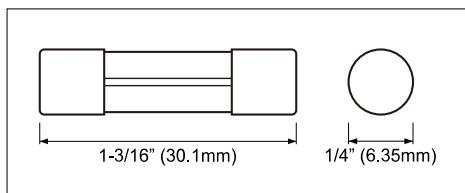

Specifications

Operating Temperature Range: -40°C to +125°C


Current Rating

Part Number	Current	Length (L)	
		Inches	mm
JASO-5	5A	1-3/16"	30.1mm
JASO-8	8A		
JASO-10	10A		
JASO-15	15A		
JASO-20	20A		
JASO-25	25A		
JASO-30	30A		
JASO-35	35A		
JASO-40	40A		
JASO-50	50A		

GMA Glass Fuse



Dimensions (mm)

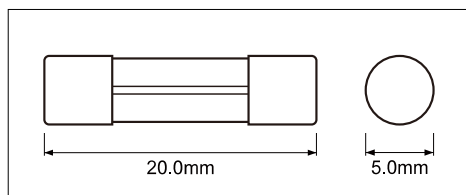

Specifications

Operating Temperature Range: -40°C to +125°C


Current Rating

Part Number	Current	Length (L)	
		Inches	mm
5*20-0.5	0.5A	0.78"	20.0mm
5*20-0.6	0.6A		
5*20-0.75	0.75A		
5*20-0.80	0.8A		
5*20-1	1A		
5*20-1.5	1.5A		
5*20-2	2A		
5*20-2.5	2.5A		
5*20-3	3A		
5*20-3.5	3.5A		
5*20-4	4A		
5*20-5	5A		
5*20-6	6A		
5*20-7	7A		
5*20-8	8A		
5*20-10	10A		
5*20-15	15A		

GBC Torpedo Fuse



Dimensions (mm)

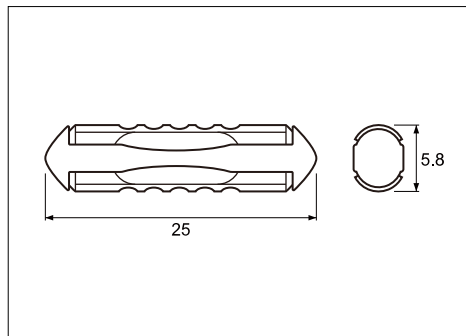

Specifications

Voltage Rating: 32 VDC

Operating Temperature Range: -40°C to +125°C

Images are for representation purposes only. Confidential Information of LUMiACTION. Distribution without written permission is strictly prohibited. All information and product design may not be final and subject to change.

Current Rating


Part Number	Body Color	Current
214002 5A	Yellow	5A
214001 8A	White	8A
204003 16A	Red	16A
214004 20A	Beige	20A
214005 25A	Blue	25A
214006 30A	Green	30A



Ceramic Cartridge Fuse



Dimensions (mm)

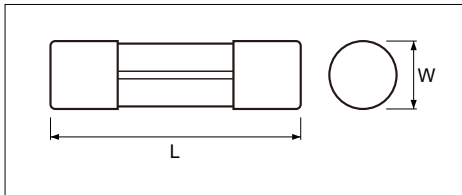

Specifications

Operating Temperature Range: -40°C to +125°C


Current Rating

Part Number	Current	Dimension	
		Width(W)	Length(L)
8.5X31.5gG-0.5	0.5A	8.5mm	31.5mm
8.5X31.5gG-1	1A		
8.5X31.5gG-2	2A		
8.5X31.5gG-4	4A		
8.5X31.5gG-6	6A		
8.5X31.5gG-10	10A		
8.5X31.5gG-16	16A		
8.5X31.5gG-20	20A		
8.5X31.5gG-25	25A		
10X38gG-0.5	0.5A	10mm	38mm
10X38gG-1	1A		
10X38gG-2	2A		
10X38gG-4	4A		
10X38gG-6	6A		
10X38gG-10	10A		
10X38gG-16	16A		
10X38gG-20	20A		
10X38gG-25	25A		
10X38gG-32	32A		
14X51gG-4	4A	14mm	51mm
14X51gG-6	6A		
14X51gG-8	8A		
14X51gG-10	10A		
14X51gG-16	16A		
14X51gG-20	20A		
14X51gG-25	25A		
14X51gG-32	32A		
14X51gG-40	40A		
14X51gG-50	50A		
14X51gG-63	63A		
22X58gG-10	10A	22mm	58mm
22X58gG-16	16A		
22X58gG-20	20A		
22X58gG-25	25A		
22X58gG-32	32A		
22X58gG-40	40A		
22X58gG-50	50A		
22X58gG-63	63A		
22X58gG-80	80A		
22X58gG-100	100A		
22X58gG-125	125A		


Inline Fuse Holder

- *MAXI Inline Fuse Holder*
- *Medium (ATO/ATC) Inline Fuse Holder*
- *Mini Inline Fuse Holder*
- *Low Profile Mini Inline Fuse Holder*
- *Micro2 Inline Fuse Holder*
- *Micro3 Inline Fuse Holder*
- *Torpedo (GBC) Inline Fuse Holder*
- *Inline Glass Fuse Holder*

MAXI Inline Fuse Holder

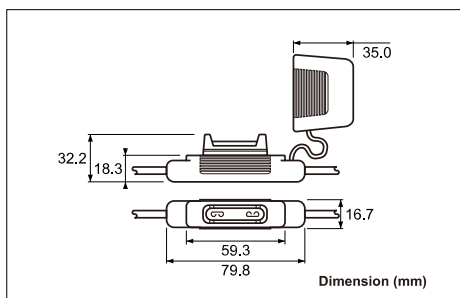

Part Number	LMFH-730		
Body Material	PVC	Wire Length	6" (each side)
Support Fuse	MAXI blade fuse	Feature	Water resistant
Current Rating	20~100A		
Wire Gauge	8#, 10#		


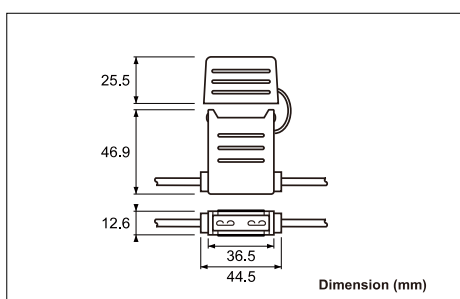


Part Number	LMFH-734		
Body Material	PVC	Wire Length	12" (loop)
Fuse Type	MAXI blade fuse	Feature	Water resistant
Current Rating	20~100A		
Wire Gauge	8#, 10#		



Images are for representation purposes only. Confidential Information of LUMiACTION. Distribution without written permission is strictly prohibited. All information and product design may not be final and subject to change.





Medium (ATO/ATC) Inline Fuse Holder

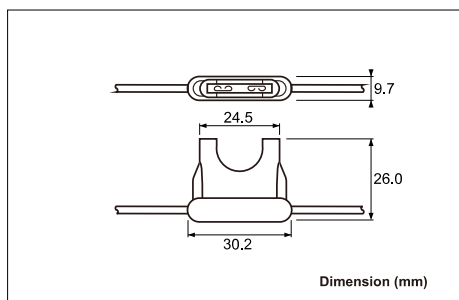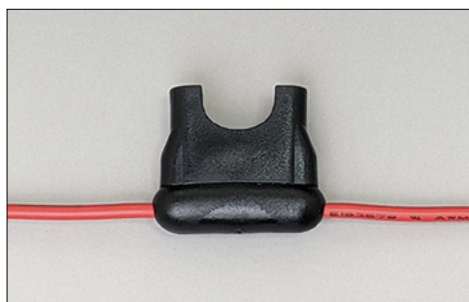

Part Number	LMFH-601A		
Body Material	PVC	Wire Length	6" (each side)
Support Fuse	Medium (ATO/ATC) blade fuse	Feature	
Current Rating	3~35A		
Wire Gauge	12#, 14#, 16#, 18#		

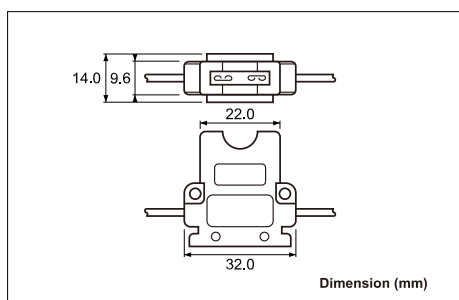
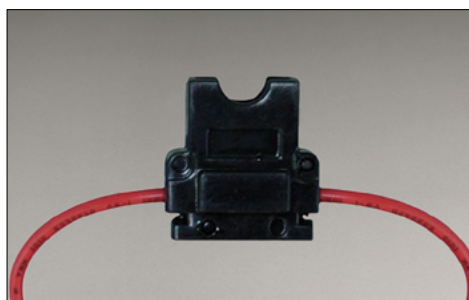


Part Number	LMFH-601B		
Body Material	Bakelite	Wire Length	8", 12" (loop)
Support Fuse	Medium (ATO/ATC) blade fuse	Feature	Stackable
Current Rating	3~35A		
Wire Gauge	12#, 14#, 16#, 18#		

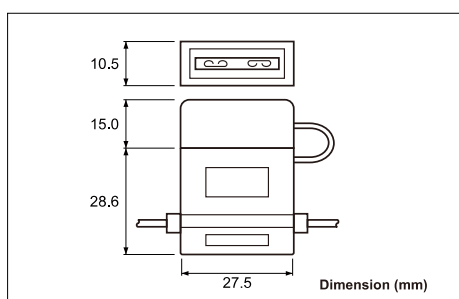
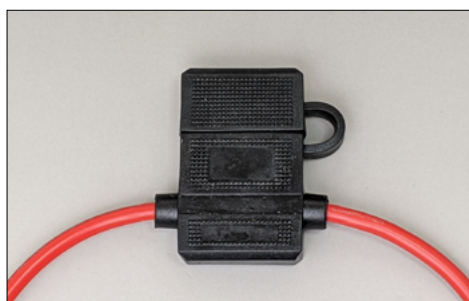


Part Number	LMFH-722		
Body Material	PVC	Wire Length	12" (loop)
Support Fuse	Medium (ATO/ATC) blade fuse	Feature	Water resistant
Current Rating	3~35A		
Wire Gauge	12#, 14#, 16#, 18#		


Images are for representation purposes only. Confidential Information of LUMIACTION. Distribution without written permission is strictly prohibited. All information and product design may not be final and subject to change.

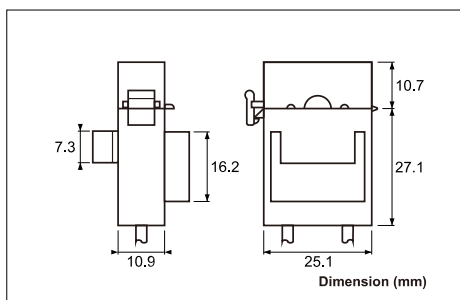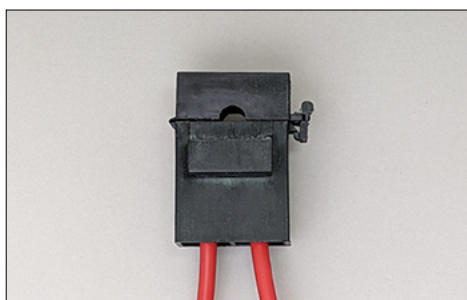



Part Number	LMFH-724		
Body Material	Nylon	Wire Length	6" (each side)
Support Fuse	Medium (ATO/ATC) blade fuse	Feature	Stackable
Current Rating	3~35A		
Wire Gauge	12#, 14#, 16#, 18#		

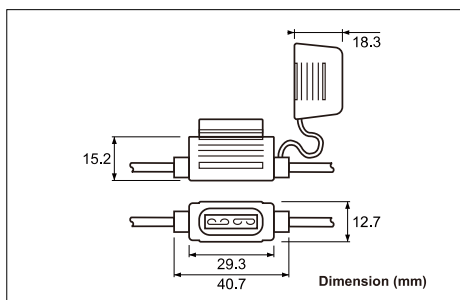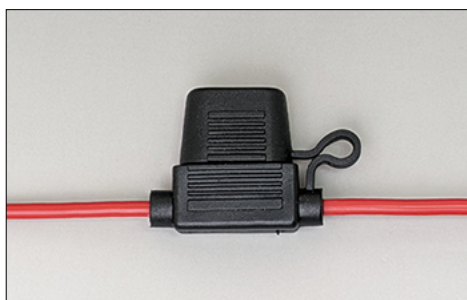



Part Number	LMFH-726		
Body Material	PVC	Wire Length	6" (each side)
Support Fuse	Medium (ATO/ATC) blade fuse	Feature	Water resistant
Current Rating	3~35A		
Wire Gauge	12#, 14#, 16#, 18#		

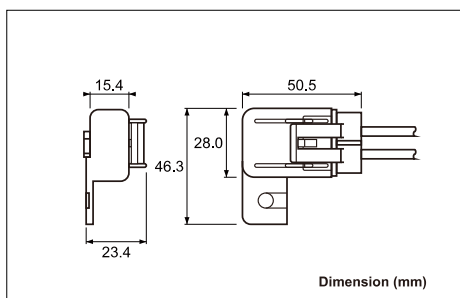

Part Number	LMFH-732		
Body Material	Nylon	Wire Length	6" (2 wires)
Support Fuse	Medium (ATO/ATC) blade fuse	Feature	Water resistant
Current Rating	3~35A		
Wire Gauge	12#		

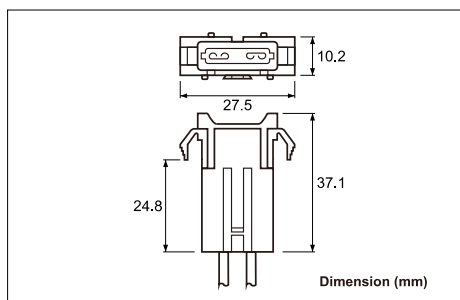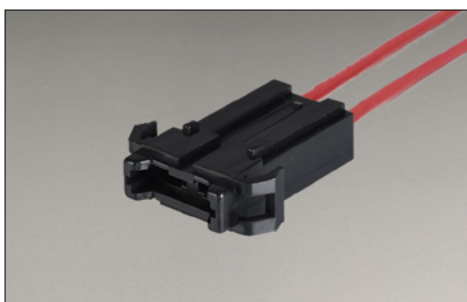


Part Number	LMFH-762		
Body Material	PC	Wire Length	6" (2 wires)
Support Fuse	Medium (ATO/ATC) blade fuse	Feature	Stackable
Current Rating	3~35A		
Wire Gauge	12#, 14#, 16#, 18#		

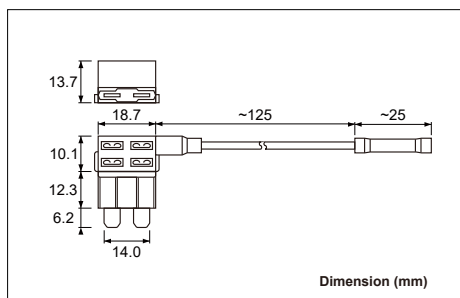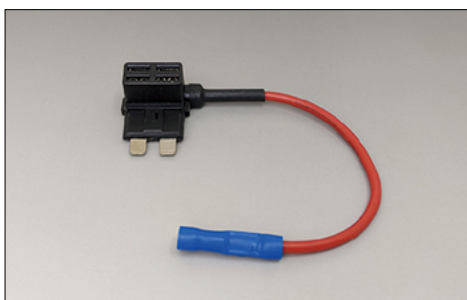



Part Number	LMFH-FT001-TB		
Body Material	Nylon	Wire Length	150mm
Support Fuse	Medium (ATO/ATC) blade fuse	Feature	Add-a-circuit
Current Rating	3~30A		
Wire Gauge	16#		

Mini Inline Fuse Holder

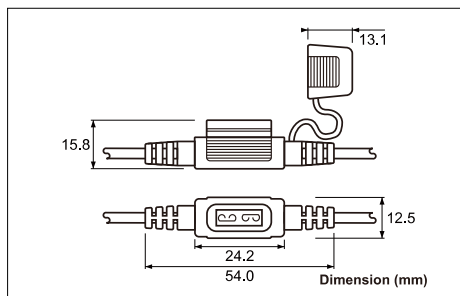



Part Number	LMFH-728		
Body Material	PVC	Wire Length	6" each side
Support Fuse	Mini blade fuse	Feature	Water resistant
Current Rating	3~35A		
Wire Gauge	12#, 14#, 16#, 18#		

Images are for representation purposes only. Confidential Information of LUMIACTION. Distribution without written permission is strictly prohibited. All information and product design may not be final and subject to change.

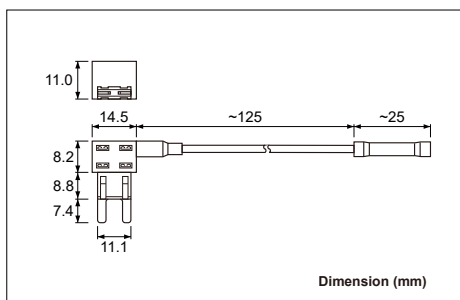
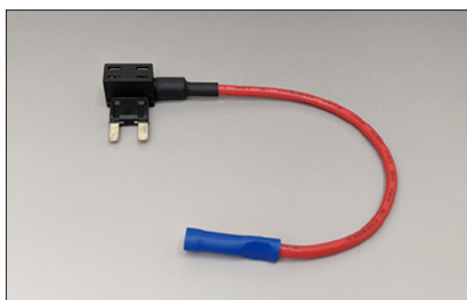


Part Number	LMFH-FT002-TB		
Body Material	Nylon	Wire Length	150mm
Support Fuse	Mini blade fuse	Feature	Add-a-circuit
Current Rating	3~25A		
Wire Gauge	16#		

Low Profile Mini Inline Fuse Holder

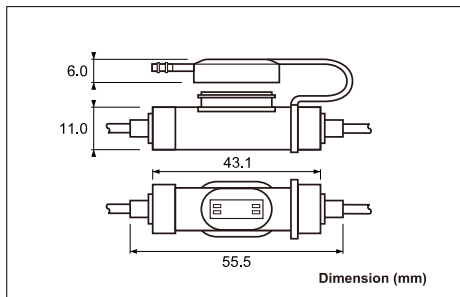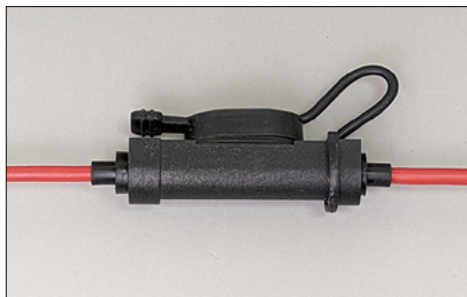



Part Number	LMFH-756		
Body Material	PC	Wire Length	6" each side
Support Fuse	Low profile mini blade fuse	Feature	
Current Rating	3~35A		
Wire Gauge	12#, 14#, 16#, 18#		

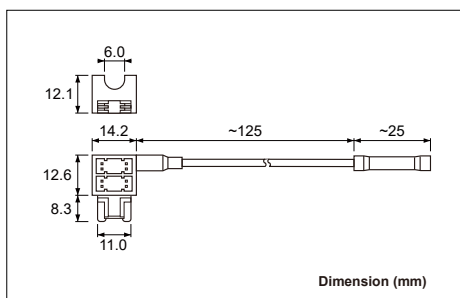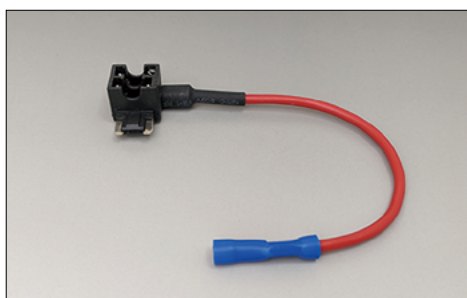

Part Number	LMFH-FT003-TB		
Body Material	Nylon	Wire Length	150mm
Support Fuse	Low profile mini blade fuse	Feature	Add-a-circuit
Current Rating	3~25A		
Wire Gauge	16#		





Micro2 Inline Fuse Holder

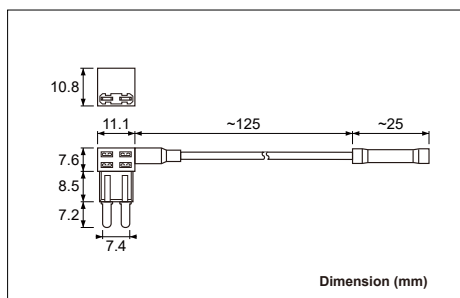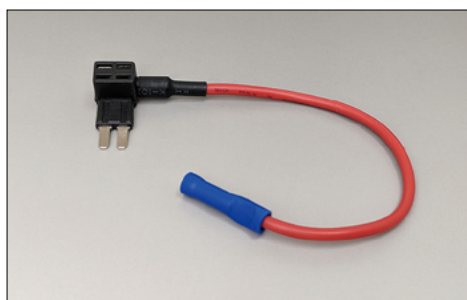


Part Number	LMFH-FT004-TB		
Body Material	Nylon	Wire Length	150mm
Support Fuse	Micro2 blade fuse	Feature	Add-a-circuit
Current Rating	3~20A		
Wire Gauge	16#		

Micro3 Inline Fuse Holder

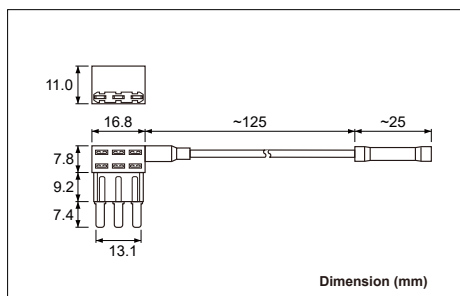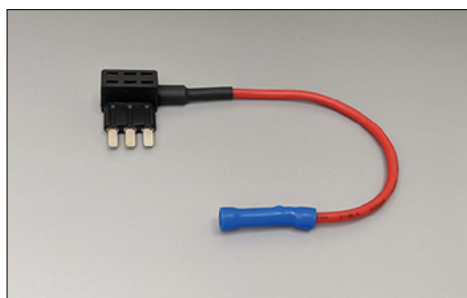

Part Number	LMFH-FT005-TB		
Body Material	Nylon	Wire Length	150mm
Support Fuse	Micro3 blade fuse	Feature	Add-a-circuit
Current Rating	3~15A		
Wire Gauge	16#		


Torpedo (GBC) Inline Fuse Holder

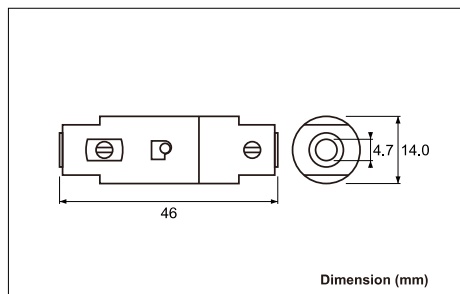



Part Number	LMFH-504		
Body Material	Bakelite	Wire Length	
Support Fuse	Torpedo (GBC) fuse	Feature	Screw type
Current Rating	5A~30A		
Wire Gauge			

Images are for representation purposes only. Confidential Information of LUMIACTION. Distribution without written permission is strictly prohibited. All information and product design may not be final and subject to change.


Inline Glass Fuse Holder

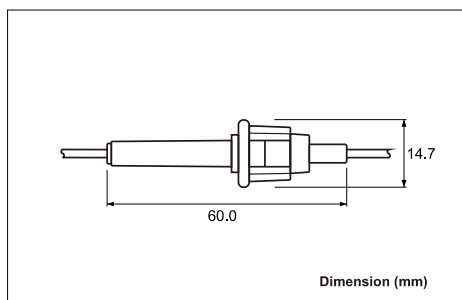

Part Number	LMFH-201		
Body Material	Nylon (A), P.P (B)	Wire Length	8", 12" (loop)
Support Fuse	6.35x30mm(JASO), 6.35x32mm(AGC)	Feature	Bayonet Type
Current Rating	1~30A(Nylon), 1~10A(P.P)		
Wire Gauge	12#, 14#, 16#, 18#, 20#		

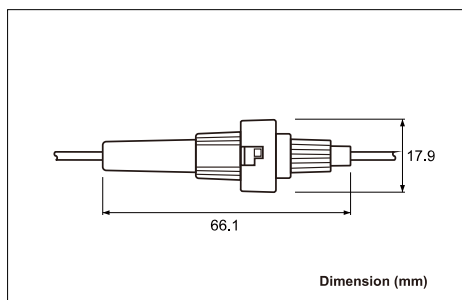
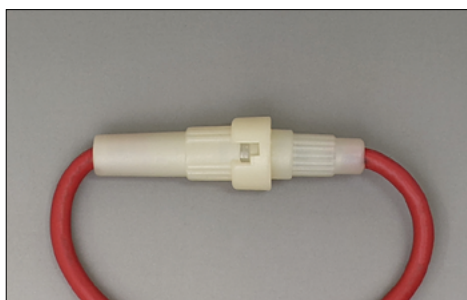


Part Number	LMFH-203		
Body Material	Nylon	Wire Length	8", 12" (loop)
Support Fuse	6.35x30mm(JASO), 6.35x32mm(AGC)	Feature	Bayonet Type
Current Rating	1~30A		
Wire Gauge	10#, 12#		

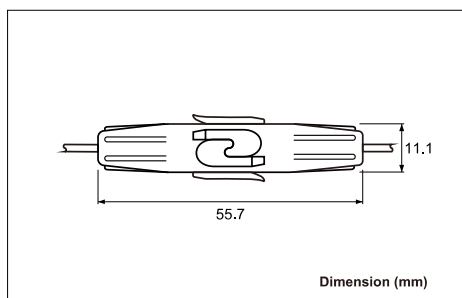


Part Number	LMFH-301		
Body Material	Nylon	Wire Length	8", 12" (loop)
Support Fuse	6.35x30mm(JASO), 6.35x32mm(AGC)	Feature	Interlock type
Current Rating	1A~20A		
Wire Gauge	14#, 16#, 18#		



Images are for representation purposes only. Confidential Information of LUMiACTION. Distribution without written permission is strictly prohibited. All information and product design may not be final and subject to change.

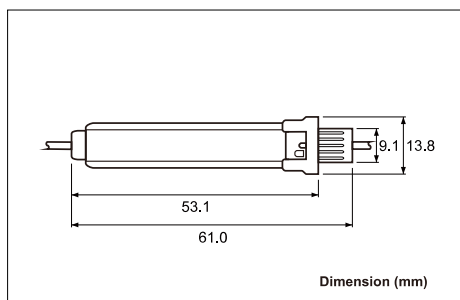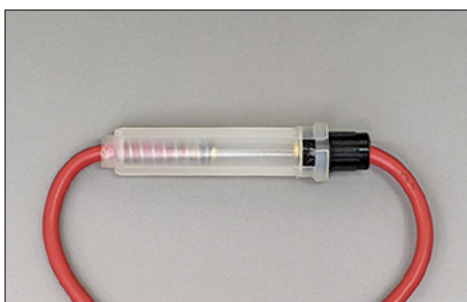

Part Number	LMFH-401		
Body Material	Nylon	Wire Length	8", 12" (loop)
Support Fuse	6.35x30mm(JASO), 6.35x32mm(AGC)	Feature	Bayonet type
Current Rating	1A~10A		
Wire Gauge	10#, 12#, 14#, 16#, 18#		

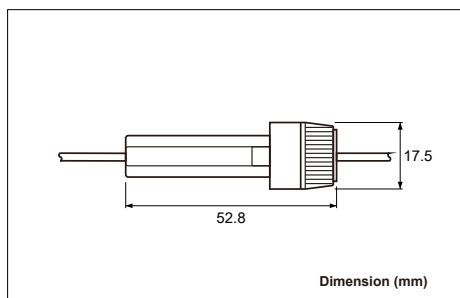


Part Number	LMFH-403		
Body Material	Nylon	Wire Length	8", 12" (loop)
Support Fuse	6.35x30mm(JASO), 6.35x32mm(AGC)	Feature	Bayonet type
Current Rating	1A~30A		
Wire Gauge	10#, 12#		

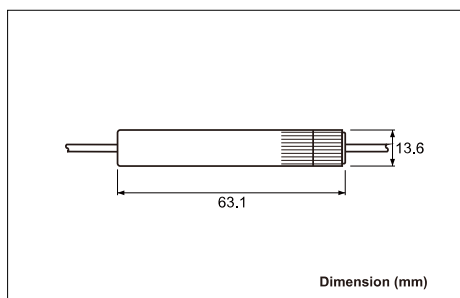
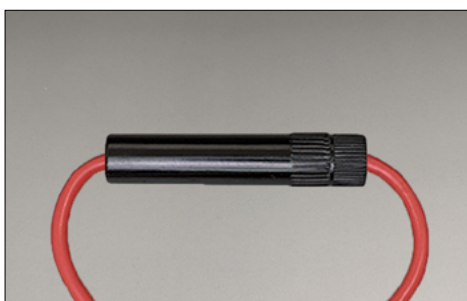


Part Number	LMFH-501		
Body Material	Bakelite	Wire Length	8", 12" (loop)
Support Fuse	6.35x30mm(JASO), 6.35x32mm(AGC)	Feature	Screw type
Current Rating	1A~35A		
Wire Gauge	10#, 12#, 14#, 16#, 18#		

Images are for representation purposes only. Confidential Information of LUMIACTION. Distribution without written permission is strictly prohibited. All information and product design may not be final and subject to change.

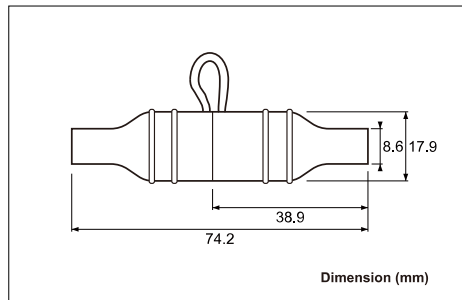

Part Number	LMFH-505		
Body Material	PVC	Wire Length	
Support Fuse	6.35x32mm(AGC)	Feature	Water resistant
Current Rating	1A~35A		
Wire Gauge			

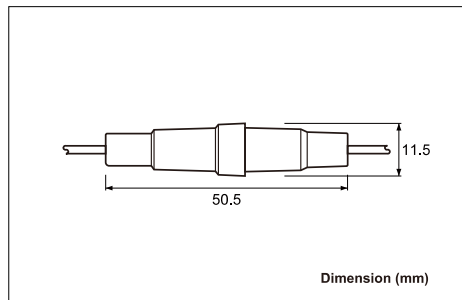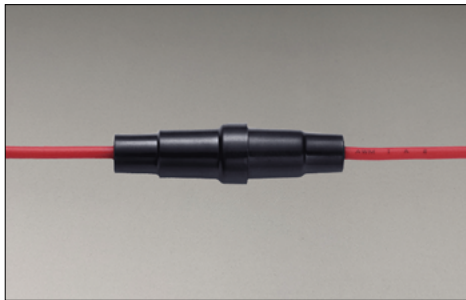

Part Number	LMFH-520-01-16#12"		
Body Material	Bakelite	Wire Length	6" each side
Support Fuse	5x20mm(GMA)	Feature	Screw type
Current Rating	15A		
Wire Gauge	16#		

Your reliable supplier from Taiwan & China since 1977

Lumiaction Headquarters

🏠 9TH FL., NO.219 Chang Chun Road,
Taipei, R.O.C. (Taiwan) 10479

☎ +886 2 25036161

✉ info@lumiaction.co

Lumiaction Shanghai Branch

🏠 555 ZhenYing Road, Qing-Pu Dst.
Shanghai 201712 China



Email Us